


SELF-REGULATING SURFACE SNOW-MELTING AND ANTI-ICING HEATING CABLE

Heating cable construction

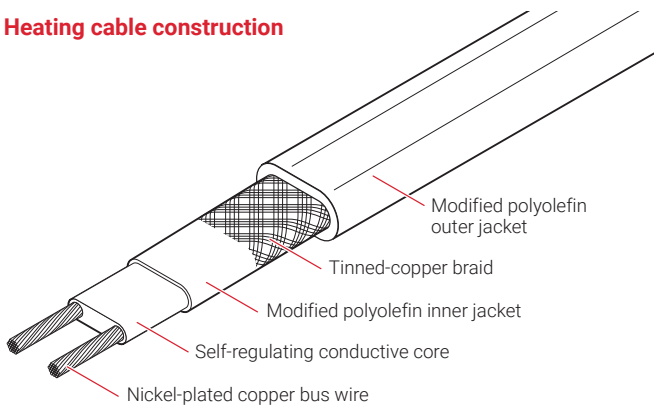

PRODUCT OVERVIEW

nVent RAYCHEM ElectroMelt provides surface snow melting and anti-icing in concrete pavement.

Self-regulating

The polymer core of an ElectroMelt heating cable automatically adjusts power output at every point along its length in response to concrete pavement temperature. This response characteristic eliminates burnouts caused by overlapping cable and provides improved energy efficiency without the need for special controls.

Parallel circuitry

The crosslinked, conductive polymer core of the ElectroMelt heating cable is extruded between two 14 AWG copper bus wires, forming a parallel circuit. This allows ElectroMelt heating cables to be cut to length and to be spliced and repaired, if necessary, in the field.

RUGGED

Specifically designed for direct burial in concrete, ElectroMelt heating cables are protected by a tinned-copper braid encased in a 70-mil modified polyolefin outer jacket. With no exposed metal parts to corrode, no cold leads to fail, and no burnout due to overlaps or hot spots, rugged ElectroMelt heating cable offers an ideal solution for all types of concrete pavement snow melting and anti-icing.



CATALOG NUMBER

Power Output W/ft (W/m)	EM2-XR		EM3-XR	
	Voltage	Power Output W/ft (W/m)	Voltage	Power Output W/ft (W/m)
	208	30(98)	347	24(79)
	240	32(105)		
	277	34(112)		

DIMENSIONS

Maximum width	0.75 in (19 mm)	0.70 in (17.8 mm)
Maximum thickness	0.38 in (10 mm)	0.31 in (7.9 mm)

MINIMUM INSTALLATION TEMPERATURE

0°F (-18°C)	0°F (-18°C)
-------------	-------------

MINIMUM BEND RADIUS

2 in (50 mm)	2 in (50 mm)
--------------	--------------

MAXIMUM CIRCUIT LENGTH FOR STARTUP AT 20°F (-7°C) IN FEET (METERS)

Circuit breaker (A)	Heating cable supply voltage			
	208 V	240 V	277 V	347 V
15	80 (24)	85 (26)	100 (31)	120 (37)
20	105 (32)	115 (35)	130 (40)	165 (50)
30	160 (49)	170 (52)	195 (59)	250 (76)
40	210 (64)	230 (70)	260 (79)	330 (101)
50	265 (81)	285 (87)	325 (99)	†

MAXIMUM CIRCUIT LENGTH FOR STARTUP AT 0°F (-18°C) IN FEET (METERS)

Circuit breaker (A)	Heating cable supply voltage			
	208 V	240 V	277 V	347 V
15	75 (23)	80 (24)	90 (27)	107 (33)
20	100 (31)	110 (34)	120 (37)	148 (45)
30	145 (44)	160 (49)	180 (55)	225 (69)
40	200 (61)	210 (64)	240 (73)	288 (88)
50	245 (75)	265 (81)	300 (91)	†
† Not permitted				

BUS WIRES

14 AWG nickel-plated copper

BRAID / OUTER JACKET

Heavy tinned-copper braid encased in a 70-mil modified polyolefin outer jacket


NOMINAL WEIGHT

180 lb/1000 ft (268 kg/1000 m)

CONNECTION KITS

RAYCHEM ElectroMelt connection kits must be used to terminate ElectroMelt heating cables. Refer to the Surface Snow Melting and Anti-Icing Design Guide – ElectroMelt (H53393) for proper connection kit selection.

APPROVALS

 877Z De-icing and Snow-melting Equipment (for EM2-XR only)



The EM2-XR and EM3-XR heating cables are UL Listed and CSA Certified only when used with the appropriate agency-approved nVent RAYCHEM connection kits and accessories.

GROUND-FAULT PROTECTION

To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of nVent RAYCHEM, agency certifications, and national electrical codes, ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection. Many RAYCHEM control and monitoring systems meet the ground-fault protection requirement.

North America

Tel +1.800.545.6258
Fax +1.800.527.5703
thermal.info@nvent.com

Europe, Middle East, Africa

Tel +32.16.213.511
Fax +32.16.213.604
thermal.info@nvent.com

Asia Pacific

Tel +86.21.2412.1688
Fax +86.21.5426.3167
cn.thermal.info@nvent.com

Latin America

Tel +1.713.868.4800
Fax +1.713.868.2333
thermal.info@nvent.com



nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER