


## FAST FUEL DETECTION PROBE APPLICATION GUIDE

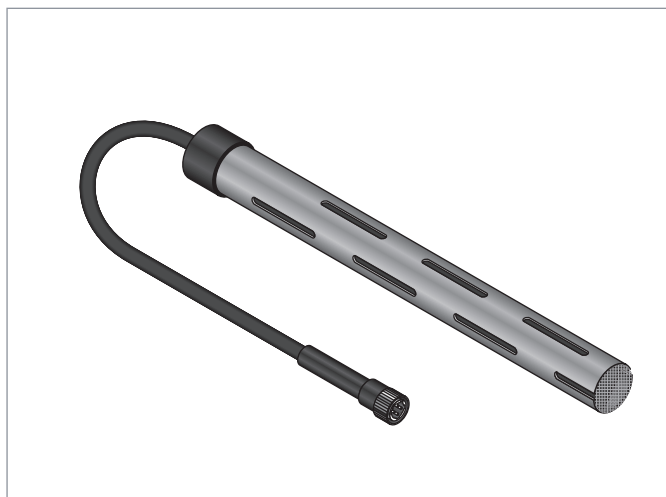

### GENERAL INFORMATION

The nVent RAYCHEM TraceTek Fast Fuel Sensor (FFS) is designed to quickly detect hydrocarbon fuels floating on water or collecting in a sump. The probe ignores the presence of water, but reacts to a thin film of fuel floating on the surface. In most cases, the FFS will reset when removed from contact with the spill and the fuel is allowed to evaporate.

Reaction time for the probe is typically less than a few seconds for light or middle weight fuels such as gasoline, jet fuel, and diesel. It is also responsive to crude oil and some heavier weight fuels and heating oil, but becomes progressively slower as the fuel viscosity increases and the volatility decreases.

The FFS is available in two lengths with multiple lead lengths and connector options. The standard product is intended for indoor installations while the weather resistant version (-WR suffix) is designed for outdoor and high humidity or water immersion applications. Refer to the FFS Data Sheet (H57977) for specific information.

### Reset Procedure

See FFS Care and Cleaning Instructions (H58307)

### Conditions of safe use

- The plastic enclosure poses a potential electrostatic hazard; do not rub or use solvents, clean only with a damp cloth.
- This equipment may not be able to withstand a 500-V isolation test between the circuitry and the monitored medium: this should be taken into account during installation.

### Design Features

- Fast response to minimal amounts of spilled fuel
- Can be reset for multiple use
- Compatible with entire range of nVent RAYCHEM TraceTek Instruments
- Up to three FFS probes can be used with modular branch connectors on a single nVent RAYCHEM TraceTek Locating Alarm Module
- Can be used with TT5000 Sensor Cable to form hybrid cable and probe leak detection systems
- Suitable for installation in Class I, Div. 1 (Zone 0) area locations with appropriate safety barrier
- Available with or without nVent RAYCHEM TraceTek metal connector
- Rugged polypropylene housing for vertical mounting in sump or pipe stand

## APPROVALS

Baseefa11ATEX0221X  
IECEx BAS 11.0111X



Ex ia IIC T4 Ga  $(-40^{\circ}\text{C} \leq t_a \leq +60^{\circ}\text{C})$   $(U_i = 15\text{V})$   
Ex ia IIA T4 Ga  $(-40^{\circ}\text{C} \leq t_a \leq +60^{\circ}\text{C})$   $(U_i = 28\text{V})$   
IEC/EN 60079-0:2012  
IEC/EN 60079-11:2012



IS/Class I, Div. 1, Groups A, B, C, D/T4; Class I Zone 0, AEx ia IIC T4  
NI/Class I, Div. 2, Groups A, B, C, D/T4; Class I Zone 2, Group IIC T4



IEC 61508 Safety Integrity Level -2 (when used with TTC-1)  
Ref BN/PTX/CB859/1580190/06/R/216/0

## ELECTRICAL PARAMETERS

$U_i = 15\text{V}/28\text{V}$   
 $I_i = 300\text{mA}$   
 $P_i = 1.125\text{W}$   
 $C_i = 0.24\mu\text{F}$   
 $L_i = 0$

## GENERAL NOTES – DO'S AND DON'TS

### DO

- Connect sensor only to nVent RAYCHEM TraceTek modules
- Observe color code when connecting sensor wires (Red to Red, Black to Black, etc)
- Mount sensor in the vertical position in a sump or trench where it will contact leaks
- Seal the wire connections properly with the included kit components
- Make sure sensor slots are clear

### DON'T

- Connect directly to any voltage source
- Connect sensor to non-nVent RAYCHEM TraceTek equipment
- Drop sensor or cause it to be mechanically shocked
- Remove the protective screen or poke objects into the slots
- Expose sensor to contaminants such as pipe dope, PVC cement, solvents, or dirt

### North America

Tel +1.800.545.6258  
Fax +1.800.527.5703  
thermal.info@nvent.com

### Europe, Middle East, Africa

Tel +32.16.213.511  
Fax +32.16.213.604  
thermal.info@nvent.com

### Asia Pacific

Tel +86.21.2412.1688  
Fax +86.21.5426.3167  
cn.thermal.info@nvent.com

### Latin America

Tel +1.713.868.4800  
Fax +1.713.868.2333  
thermal.info@nvent.com



Our powerful portfolio of brands:

**nVent.com** CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER